


Cuscinetti a sfera fila unica ZKLN2052-2Z-INA - ZKLN2052-2Z-INA

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-sfera/fila-unica/zkln2052-2z-ina>

Axial angular contact ball bearings ZKLN2052-2Z
double direction, gap seats on both sides

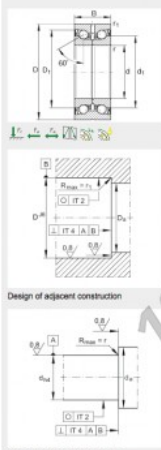

d	20 mm	Tolerance: -0,005
D	52 mm	Tolerance: -0,010
B	28 mm	Tolerance: -0,25
	60 °	Contact angle
D_{0max}	43 mm	
d_i	34,5 mm	
d_{0max}	25 mm	
r_{1max}	0,6 mm	
r_{2max}	0,3 mm	
m	0,31 kg	Mass
C₁	25000 N	Basic dynamic load rating, axial
C_{0a}	47000 N	Basic static load rating, axial
n_{Grease}	5400 1/min	Limiting speed for grease lubrication
M_{fr}	0,16 Nm	Bearing frictional torque
S_{ax}	600 N/μm	Axial rigidity
S_{ti}	140 Nm/rad	Tilting rigidity
M_r	0,273 kg x cm ²	Mass moment of inertia for rotating inner ring
	2 μm	Axial runout
	The axial runout data for screw drive bearing arrangements are based on the rotating inner ring.	
	ZM20	Designation of recommended INA locknut
	AM20	Designation of recommended INA locknut
	Locknuts not included in delivery.	
M_L	18 Nm	Tightening torque
	Only valid in conjunction with INA precision locknuts	
	9079 N	Axial preload force

Design of adjacent construction

CARATTERISTICHE DEL PRODOTTO

Marchio	INA
N° Ean13	3616060457035
Diametro interno	20 mm
Impermeabilizzazione	Schermo su entrambi i lati
Diametro esterno	52 mm
Spessore	28 mm
Imballaggio	1

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE