


Cuscinetti conico

74550-74850-B-TIMKEN - 74550-74850-B-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/74550-74850-b-timken>

TAPERED ROLLER BEARINGS

TYPE TSF

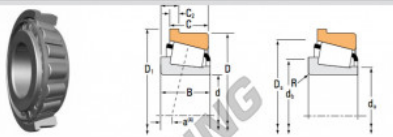

| Bearing Dimensions | | | Load Ratings | | | | | | Part Number | |
|--------------------|----------|-------------|---------------|-------------|---------------|-------------|--------------|-------|-------------|--|
| Bore d | O.D. D | Width T_1 | Dynamic C_1 | Factors e | Dynamic C_2 | Factors K | Static C_0 | Inner | Outer | |
| mm | mm | mm | N | | N | | N | | | |
| 139.7 | 215.9 | 47.625 | 30200 | 0.14 | 3000 | 1.20 | 61400 | 74550 | 74850-B | |
| 5.500 | 8.500 | 0.8125 | 6930 | | 2200 | | 13000 | | | |

| Bearing Dimensions | | | | | | Shaft | | | Housing | | Geometry Factors | | | Bearing Weight |
|--------------------|-----------|---------------------|------------------------|--------------------|-----------------------------------|-----------------------------|-----------------------------|-----------------------------|---------|-------|------------------|------|-------|----------------|
| Width B | Width C | Eff. Ctr. $a^{(1)}$ | Outer Ring Range D_1 | Flange Width C_1 | Max Shaft Fillet Radius $R^{(1)}$ | Sealing Shoulder Dia. d_1 | Sealing Shoulder Dia. d_2 | Sealing Shoulder Dia. D_1 | G_1 | G_2 | C_0 | | kg | |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | | | | | mm | |
| 47.625 | 34.305 | 2.3 | 223.720 | 7.838 | 3.3 | 151.6 | 198.0 | 205.8 | 302.9 | 18.5 | 0.1328 | 6.10 | 13.32 | |
| 1.8750 | 1.3750 | 0.09 | 8.804 | 0.3125 | 0.14 | 5.94 | 6.22 | 8.23 | | | | | | |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | TIMKEN |
| N° Ean13 | 3663952340050 |
| Diametro interno | 139.7 mm |
| Diametro esterno | 215.9 mm |
| Spessore | 47.625 mm |
| Imballaggio | 1 |

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE