


## Cuscinetti conico 657-654D-TIMKEN - 657-654D-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/657-654d-timken>

**TAPERED ROLLER BEARINGS**  
DOUBLE-ROW • TYPE TDO

**TYPE TDO**

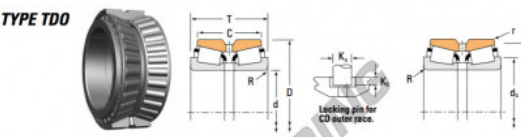

| Bearing Dimensions |         |         |                           | Load Ratings           |                 |                       |                 |                        |                 |                       |        |                       |      |
|--------------------|---------|---------|---------------------------|------------------------|-----------------|-----------------------|-----------------|------------------------|-----------------|-----------------------|--------|-----------------------|------|
| Bore d             | O.D. D  | Width T | Double Outer Ring Width C | Dynamic <sup>(1)</sup> |                 | Static <sup>(2)</sup> |                 | Dynamic <sup>(3)</sup> |                 | Static <sup>(4)</sup> |        | Factor <sup>(5)</sup> |      |
| mm                 | mm      | mm      | mm                        | C <sub>10</sub>        | C <sub>90</sub> | N <sub>10</sub>       | N <sub>90</sub> | C <sub>10</sub>        | C <sub>90</sub> | C <sub>50</sub>       | N      | N                     | K    |
| 73.025             | 152.400 | 95.250  | 79.200                    | 30000                  | 18700           | 0.41                  | 1.85            | 2.48                   | 84000           | 44000                 | 112000 | 14000                 | 1.43 |
| 2.8750             | 6.0000  | 3.7500  | 3.0000                    |                        |                 |                       |                 |                        |                 |                       |        |                       |      |

| Part Number |       | Dimensions                              |                                      |   |                                      |                |                | Pin            |                | Geometry Factors |                |  | Bearing Weight |
|-------------|-------|---|--------------------------------------|---|--------------------------------------|----------------|----------------|----------------|----------------|------------------|----------------|--|----------------|
| Inner       | Outer | Max. Shaft Fillet Radius R <sub>1</sub> | Backing Shoulder Dia. d <sub>2</sub> | Max. Housing Fillet Radius r <sub>1</sub> | Backing Shoulder Dia. D <sub>2</sub> | K <sub>1</sub> | K <sub>2</sub> | G <sub>1</sub> | G <sub>2</sub> | C <sub>1</sub>   | C <sub>2</sub> |  |                |
| 657         | 654D  | 3.5<br>0.14                             | 91.8<br>3.58                         | 1.5<br>0.06                               | 149.8<br>5.93                        | -              | -              | 136.6          | 27.3           | 0.0816           |                |  | 7.81<br>17.23  |

### CARATTERISTICHE DEL PRODOTTO

|                  |               |
|------------------|---------------|
| Marchio          | TIMKEN        |
| N° Ean13         | 3663952357881 |
| Diametro interno | 73.025 mm     |
| Diametro interno | 2 7/8" inch   |
| Diametro esterno | 152.4 mm      |
| Diametro esterno | 6" inch       |
| Spessore         | 95.25 mm      |
| Spessore         | 3 3/4" inch   |
| Imballaggio      | 1             |

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE