


Cuscinetti conico 775-774D-TIMKEN - 775-774D-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/775-774d-timken>

TAPERED ROLLER BEARINGS
DOUBLE-ROW • TYPE TDO

TYPE TDO

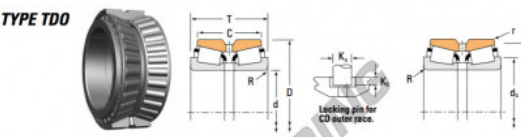

| Bearing Dimensions | | | | Load Ratings | | | | | | | |
|--------------------|---------|---------|---------------------------|--|--------------------------------------|---------------------------------------|---------------------------------------|--|--|--|-------------------------|
| Bore d | O.D. D | Width T | Double Outer Ring Width C | Dynamic ⁽¹⁾ C ₁₀ | Static ⁽¹⁾ C ₀ | Dynamic ⁽²⁾ Y ₁ | Dynamic ⁽²⁾ Y ₂ | Dynamic ⁽³⁾ C ₉₀ | Dynamic ⁽³⁾ C ₅₀ | Dynamic ⁽³⁾ C ₂₀ | Factor ⁽⁴⁾ K |
| mm | mm | mm | mm | N | N | N | N | N | N | N | |
| 88.900 | 180.975 | 104.774 | 85.725 | 82000 | 130000 | 0.20 | 1.75 | 2.61 | 89700 | 92000 | 156000 |
| 3.500 | 7.1250 | 4.1250 | 3.3750 | | | | | 20200 | 13200 | 28100 | 1.51 |

| Part Number | | Dimensions | | | | | | Pin | | Geometry Factors | | | Bearing Weight |
|-------------|-------|---|--------------------------------------|---|--------------------------------------|----------------|----------------|----------------|----------------|------------------|----------------|--|----------------|
| Inner | Outer | Max. Shaft Fillet Radius R ₁ | Backing Shoulder Dia. d ₁ | Max. Housing Fillet Radius r ₁ | Backing Shoulder Dia. D ₁ | K ₁ | K ₂ | G ₁ | G ₂ | C ₁ | | | |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | kg | | |
| 775 | 774D | 4.8 0.19 | 112.8 4.41 | 1.5 0.06 | 168.8 6.61 | - | - | 227.3 | 41.3 | 0.1087 | 12.00 28.32 | | |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | TIMKEN |
| N° Ean13 | 3663952358536 |
| Diametro interno | 88.9 mm |
| Diametro esterno | 180.975 mm |
| Spessore | 104.774 mm |
| Imballaggio | 1 |

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE