


## Cuscinetti conico NA558-552D-TIMKEN - NA558-552D-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/na558-552d-timken>

**TAPERED ROLLER BEARINGS**  
DOUBLE-ROW • TYPE TNA

**TYPE TNA**

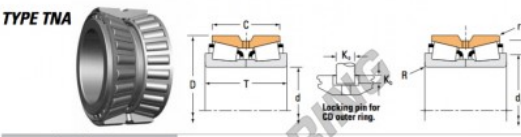

| Bearing Dimensions |         |         |                           | Load Ratings          |                       |                       |                       |                       |                       |                       |                       |                       |  |
|--------------------|---------|---------|---------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|--|
| Bore d             | O.D. D  | Width T | Double Outer Ring Width C | Dynami <sup>(1)</sup> | Factor <sup>(2)</sup> | Factor <sup>(2)</sup> | Factor <sup>(2)</sup> | Dynami <sup>(3)</sup> | Dynami <sup>(3)</sup> | Dynami <sup>(3)</sup> | Factor <sup>(4)</sup> | Factor <sup>(4)</sup> |  |
| mm                 | mm      | mm      | mm                        | C <sub>10</sub>       | Y <sub>1</sub>        | Y <sub>2</sub>        | C <sub>90</sub>       | C <sub>50</sub>       | C <sub>100</sub>      | C <sub>150</sub>      | K                     | K                     |  |
| 60.325             | 123.825 | 79.375  | 63.500                    | 32000                 | 0.20                  | 1.00                  | 2.90                  | 49400                 | 25500                 | 80100                 | 1.00                  | 1.00                  |  |
| in                 | in      | in      | in                        | in                    |                       |                       |                       | in                    | in                    | in                    |                       |                       |  |
| 2.3750             | 4.8750  | 3.1250  | 2.5000                    | 1260                  |                       |                       |                       | 11100                 | 9500                  | 19400                 |                       |                       |  |

| Part Number |       | Shaft                                    |                                      | Housing                                    |                                      | Pin            |                | Bearing Weight |
|-------------|-------|--|--------------------------------------|--|--------------------------------------|----------------|----------------|----------------|
| Inner       | Outer | Max Shaft Fillet Radius R <sup>(1)</sup> | Backing Shoulder Dia. d <sub>s</sub> | Max Housing Fillet Radius r <sup>(2)</sup> | Backing Shoulder Dia. D <sub>s</sub> | K <sub>1</sub> | K <sub>2</sub> |                |
| mm          | mm    | mm                                       | mm                                   | mm   | mm                                   | mm             | mm             | kg             |
| NA558       | 552D  | 3.5                                      | 76.0                                 | 1.5  | 119.0                                | -              | -              | 4.21           |
|             |       | 0.14                                     | 2.99                                 | 0.06                                       | 4.53                                 | -              | -              | 0.93           |

### CARATTERISTICHE DEL PRODOTTO

|                  |               |
|------------------|---------------|
| Marchio          | TIMKEN        |
| N° Ean13         | 3663952373942 |
| Diametro interno | 60.325 mm     |
| Diametro esterno | 123.825 mm    |
| Spessore         | 79.375 mm     |
| Imballaggio      | 1             |

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE