Cuscinetti a rullini
RNA6912-U-IKO - RNA6912-U-IKO

https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/rullini/rna6912-u-iko

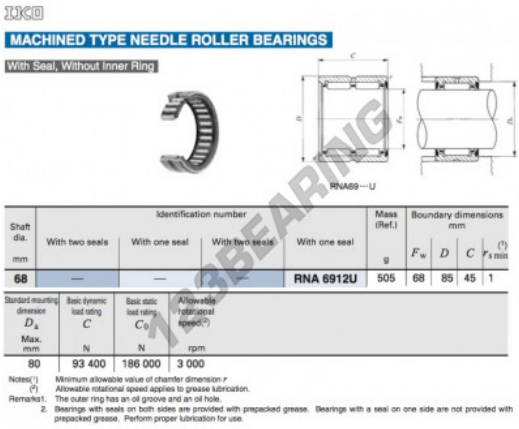

IKO

MACHINED TYPE NEEDLE ROLLER BEARINGS

With Seal, Without Inner Ring

RNA69···U

Shaft dia. mm	Identification number: With two seals	With one seal	With two seals	With one seal	Mass (Ref.) g	Boundary dimensions mm: F_w	D	C	r_s min (1)
68	—	—	—	RNA 6912U	505	68	85	45	1

Standard mounting dimension D_a Max. mm	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed (2) rpm
80	93 400	186 000	3 000

Notes(1) Minimum allowable value of chamfer dimension r

(2) Allowable rotational speed applies to grease lubrication.

Remarks1. The outer ring has an oil groove and an oil hole.

2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

123BEARING

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952379494
Diametro interno	68 mm
Diametro esterno	85 mm
Spessore	45 mm
Imballaggio	1

contatto@123cuscinetti.it
+33 3 59 36 04 90
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE