


## Cuscinetti a rullini GBRI102216-UU-IKO - GBRI102216-UU-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/rullini/gbri102216-uu-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

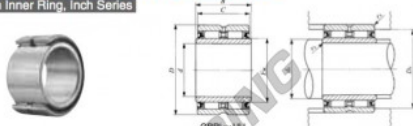

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)				
	With two seals	With one seal		$d$	$D$	$C$		
15.875 ( $\frac{5}{8}$ )	GBRI 102216 UU		127	15.875 ( $\frac{5}{8}$ )	34.925 ( $1\frac{1}{4}$ )	25.400 (1)		
$B$	$F_w$	Standard mounting dimensions mm			Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring
		Min.	Max.	$r_{as\ max}$ <sup>(1)</sup>				
25.650	22.225 ( $\frac{7}{8}$ )	21	21.2	30	28 600	40 100	3 500	LRBZ 101416

Notes: (1) Minimum allowable value of chamfer dimension  $r$ .  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: This outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

## CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952383316
Diametro interno	15.875 mm
Diametro esterno	34.925 mm
Spessore	25.4 mm
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE