


## Cuscinetti a rullini GBRI122416-UU-IKO - GBRI122416-UU-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/rullini/gbri122416-uu-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

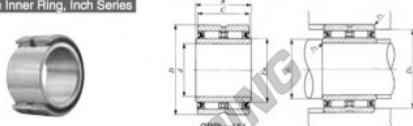

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
19.050 ( $\frac{3}{4}$ )	GBRI 122416 UU		143	19.050 ( $\frac{7}{8}$ )	38.100 (1 $\frac{1}{2}$ )	25.400 (1)			
B	F <sub>w</sub>	Standard mounting dimensions - mm			Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring	
		Min.	Max.	D <sub>s</sub> Max.					r <sub>as max</sub> <sup>(1)</sup>
25.650	25.400 (1)	24	24.4	33.3	0.6	31 000	46 100	3 000	LRBZ 121616

Notes: (1) Minimum allowable value of chamfer dimension r.  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: This outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

## CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952384610
Diametro interno	19.05 mm
Diametro esterno	38.1 mm
Spessore	25.4 mm
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE