


## Snodi sferici GE SB9515082-IKO - SB9515082-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/teste-snodo/ge/sb9515082-iko>

**IKO**  
**SPHERICAL BUSHINGS**  
Steel-on-steel Spherical Bushings

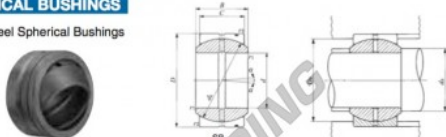

Shaft dia. mm	Identification number		Mass (Ref.) kg	Boundary dimensions mm						Permissible tilting angle degree $\alpha$
	SB	9515082		$d$	D	B	C	$d_k$	$r_1$ mm <sup>(1)</sup>	
95	SB	9515082	6.05	95	150	82	70	140	0.6	5
Mounting dimensions mm		Dynamic load capacity $C_d$ N		Static load capacity $C_s$ N						
$d_2$	$D_2$	$d_1$	$D_1$							
Min.	Max. <sup>(2)</sup>	Min.	Max.							
99.5	113.5	145.5	130	961 000	5 770 000					

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimensions  $r_1$  and  $r_2$ .  
<sup>(2)</sup> When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of  $d_2$ .  
Remark: 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.  
2. Not provided with prepacked grease. Perform proper lubrication for use.

### CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952391519
Diametro interno	95 mm
Diametro esterno	150 mm
Spessore	82 mm
Tipo	GE
Lubrificazione	senza
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE