


Snodi sferici GE SB120A-IKO - SB120A-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/teste-snodo/ge/sb120a-iko>

IKO
SPHERICAL BUSHINGS
Steel-on-steel Spherical Bushings

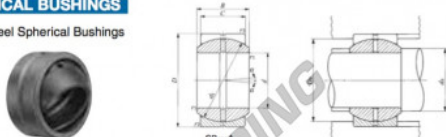

Shaft dia. mm	Identification number	Mass (Ref.) kg	Boundary dimensions mm						Permissible tilting angle degree α
			d	D	B	C	d_k	r_1 mm ⁽¹⁾	
120	SB 120A	12.4	120	190	105	90	175	1	5
Mounting dimensions mm		Dynamic load capacity C_d N	Static load capacity C_s N						
d_s	D_s		C_d	C_s					
Min. Max. ⁽²⁾	Max. Min.	N	N						
125.5 140	184.5 162	1 540 000	9 270 000						

Notes⁽¹⁾ Minimum allowable value of chamfer dimensions r_1 and r_2 .
⁽²⁾ When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d_s .
Remark: 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.
2. Not provided with prepacked grease. Perform proper lubrication for use.

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952391588
Diametro interno	120 mm
Diametro esterno	190 mm
Spessore	105 mm
Tipo	GE
Lubrificazione	senza
Imballaggio	1

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE