


Snodi sferici GE SBB56-IKO - SBB56-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/teste-snodo/ge/sbb56-iko>

IKO
SPHERICAL BUSHINGS
Steel-on-steel Spherical Bushings Inch Series

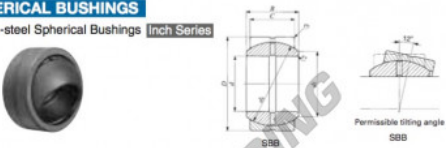

Shaft dia. mm (inch)	Identification number		Mass (flat) kg	Boundary dimensions mm(inch)			
	Without seal	With seals		d	D	B	C
88.900 (3 1/2)	SBB 56		4.83	88.900 (3 1/2)	139.700 (5 1/2)	77.77 (3.062)	66.68 (2.625)
Radial internal clearance mm Min./Max.	Mounting dimensions mm		Dynamic load capacity C _d N	Static load capacity C _s N			
	d _k	d ₁ r ₁ max. r ₂ max.		C _d N	C _s N	C _s N	
128(5.039)	0.13 / 0.23		101.6	0.6	0.8	837 000	5 020 000

Notes:
(1) Minimum allowable value of chamfer dimensions r₁ and r₂.
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d_k.
Remark 1: The inner ring and the outer ring have an oil groove and two oil holes, respectively.
2: Not provided with prepacked grease. Perform proper lubrication for use.

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952392967
Diametro interno	88.9 mm
Diametro esterno	139.7 mm
Spessore	77.77 mm
Tipo	GE
Lubrificazione	senza
Imballaggio	1

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE