


Snodi sferici GE SBB96-IKO - SBB96-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/teste-snodo/ge/sbb96-iko>

IKO
SPHERICAL BUSHINGS
Steel-on-steel Spherical Bushings Inch Series

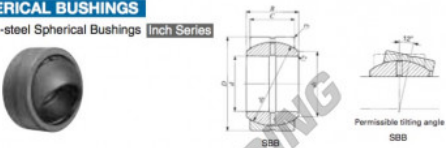

Shaft dia. mm (inch)	Identification number		Mass (Ref.) kg	Boundary dimensions mm(inch)			
	Without seal	With seals		d	D	B	C
152.400 (6)	SBB 96		17.6	152.400 6	222.250 8 7/8	120.65(4.750)	104.78(4.125)
Radial internal clearance mm	Mounting dimensions mm		Dynamic load capacity C _d N	Static load capacity C _s N			
	d _k	d ₁ r ₁ Max. r ₂ Max.		r ₁ Max. r ₂ Max.			
207(8.150)	0.13 / 0.23		167.5	0.8	1.1	2 130 000	12 800 000

Notes:
(1) Minimum allowable value of chamfer dimensions r₁ and r₂.
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d_k.
Remark 1: The inner ring and the outer ring have an oil groove and two oil holes, respectively.
2: Not provided with prepacked grease. Perform proper lubrication for use.

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3663952393100
Diametro interno	152.4 mm
Diametro esterno	222.25 mm
Spessore	120.65 mm
Tipo	GE
Lubrificazione	senza
Imballaggio	1

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE