


Rotelle con perno CFES6-BR-IKO - CFES6-BR-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-sfera/rotelle-perno/cfes6-br-iko>



CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers With Cage/With Hexagon Hole

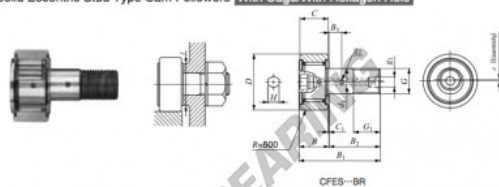

| Stud dia. mm | Identification number | | | | | | | | Mass (Ref.) | | | | | | | |
|------------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------|-----|---------------------------------|----------------------------------|-------------------------------------|---|------------------------------------|-------|
| | Shield type | | | | Sealed type | | | | g | D | C | d ₁ | | | | |
| | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With cylindrical outer ring | | | | | | | | |
| 6 | CFES | 6 | BR | | | | | | 18.5 | 16 | 11 | 6 | | | | |
| Boundary dimensions mm | | | | | | | | | | | | | | | | |
| G | G ₁ | B | B ₁ | B ₂ | B ₃ | C ₁ | g ₁ | g ₂ | H | ε | Mounting dimension f Min. mm | Maximum tightening torque N·m | Basic dynamic load rating C N | Basic static load rating C ₀ N | Maximum allowable static load N | |
| M 6×1 | 8 | 12.2 | 28.2 | 16 | — | 0.6 | — | — | 3 | 0.3 | 0.25 | 11 | 2.7 | 3 660 | 3 650 | 1 980 |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | IKO |
| N° Ean13 | 3663952443362 |
| Diametro interno | 6 mm |
| Diametro esterno | 16 mm |
| Spessore | 11 mm |
| Imballaggio | 1 |

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE