


Rotelle con perno CR28-R-IKO - CR28-R-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-sfera/rotelle-perno/cr28-r-iko>

IKO

CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Screwdriver Slot

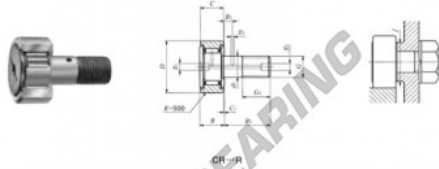

| Stud dia. mm (inch) | Identification number | | | | Mass (Ref.) g | D | C | d ₁ | G UNF | G ₁ |
|------------------------------|----------------------------|--------------------------------|----------------------------|--------------------------------|--------------------------|---------------------------|---|--------------------------------------|--|---|
| | Shield type | | Sealed type | | | | | | | |
| | With covered outer ring | With cylindrical outer ring | With covered outer ring | With cylindrical outer ring | | | | | | |
| 19.050 ($\frac{3}{4}$) | CR 28 R | | | | 365 | 44.450 ($1\frac{3}{4}$) | 25.400 (1) | 19.050 ($\frac{3}{4}$) | 7/-18 | 22.225 ($\frac{7}{8}$) |
| Boundary dimensions mm(inch) | | | | | | | | | | |
| B _{max} | B ₂ | B ₃ | C ₁ | S ₁ | S ₂ | F | Bearing dimension f Min. mm(inch) | Maximum tightening torque C | Basic dynamic load rating C ₀ | Basic static load rating C ₀ |
| 25.8125 | 44.450 ($1\frac{3}{4}$) | 11.112 ($\frac{7}{8}$) | 0.794 ($\frac{1}{8}$) | 4.762 ($\frac{3}{8}$) | 3.969 ($\frac{5}{16}$) | 1.588 ($\frac{1}{8}$) | 22.543 ($1\frac{1}{8}$) | 100 | 25 100 | 38 200 |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | IKO |
| N° Ean13 | 3616060463029 |
| Diametro interno | 19.05 mm |
| Diametro esterno | 44.45 mm |
| Spessore | 25.4 mm |
| Peso | 365 g |
| Imballaggio | - |

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE