


## Cuscinetti assiali a rullini AZK28044030-IKO - AZK28044030-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/assiali-rullini/azk28044030-iko>

IKO  
**THRUST BEARINGS**  
Thrust Roller Bearings

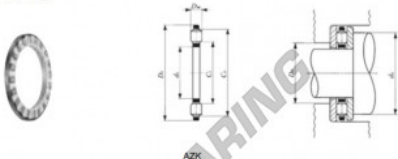

| Shaft dia. mm | Identification number |               |                       |               |            |            |               |
|---------------|-----------------------|---------------|-----------------------|---------------|------------|------------|---------------|
|               | Thrust roller bearing | Mass (Ref.) g | Thrust roller bearing | Mass (Ref.) g | Inner ring | Outer ring | Mass (Ref.) g |
| 280           | AZ 28044080           | 54 600        | AZK 28044030          | 19 200        | WS 280440  | GS 280440  | 17 700        |

| Boundary dimensions mm |     |    |                |                |                |    |                    |                |                | Standard mounting dimensions mm |                     | Basic dynamic load rating C | Basic static load rating C <sub>0</sub> | Allowable rotational speed <sup>(2)</sup> |
|------------------------|-----|----|----------------|----------------|----------------|----|--------------------|----------------|----------------|---------------------------------|---------------------|-----------------------------|---|---|
| d                      | D   | T  | d <sub>c</sub> | D <sub>c</sub> | D <sub>w</sub> | B  | r <sub>s</sub> (1) | C <sub>1</sub> | C <sub>2</sub> | d <sub>s</sub> Min.             | D <sub>s</sub> Max. | N                           | N                                       | rpm                                       |
| 280                    | 440 | 80 | 280.15         | 438            | 30             | 25 | 5                  | 309            | 422            | 420                             | 311                 | 1 420 000                   | 7 490 000                               | 800                                       |

Notes: (1) Minimum allowable value of chamfer dimension r  
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

### CARATTERISTICHE DEL PRODOTTO

|                  |               |
|------------------|---------------|
| Marchio          | IKO           |
| N° Ean13         | 3663952487991 |
| Diametro interno | 280 mm        |
| Diametro esterno | 440 mm        |
| Spessore         | 30 mm         |
| Peso             | 19200 g       |
| Imballaggio      | 1             |

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE