


Teste a snodo SA SA40-T-K-DURBAL - SA40-T-K-DURBAL

<https://www.123cuscinetti.it/cuscinetti-supporti/teste-snodo/sa/sa40-t-k-durbal>

SA40-T-K

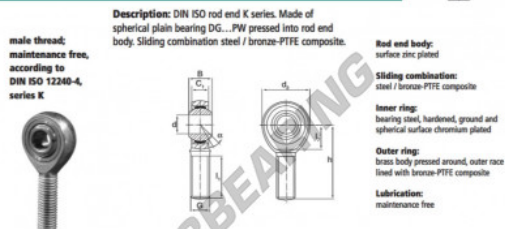

male thread;
maintenance free,
according to
DIN ISO 12240-4,
series K

Description: DIN ISO rod end K series. Made of spherical plain bearing DG...PW pressed into rod end body. Sliding combination steel / bronze-PTFE composite.

Rod end body:
surface zinc plated

Sliding combination:
steel / bronze-PTFE composite

Inner ring:
bearing steel, hardened, ground and
spherical surface chromium plated

Outer ring:
brass body pressed around, outer race
lined with bronze-PTFE composite

Lubrication:
maintenance free

order number	measurement [mm]		measurement [mm]		C ₁	d ₂	
	right hand thread	left hand thread	d	G			
SA 40 T/K			40	M 42 x 2	49	33,00	91

type	measurement [mm]		h	α [°]	Tragzahlen C ₁₀ [kN]	weight [kg]
	l ₁ min	l ₂				
SA / SAL 40 T/K	90	46	150	17		2,300

CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952490458
Diametro interno	40 mm
Diametro esterno	91 mm
Spessore	49 mm
Tipo	SA
Peso	2300 g
Il filo	Filetto destro
Lubrificazione	senza
Imballaggio	1

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE