

## Teste a snodo SI SSIL14-T-K-DURBAL - SSIL14-T-K-DURBAL

<https://www.123cuscinetti.it/cuscinetti-supporti/teste-snodo/si/ssil14-t-k-durbal>

### SSIL14-T-K



female thread: maintenance free, according to DIN ISO 12240-4, series K, in stainless steel

**Description:** DIN ISO rod end K series. Made of spherical plain bearing DG...PW pressed into rod end body. Sliding combination steel / bronze-PTFE composite.


Red end body: stainless steel

Sliding combination: steel / bronze-PTFE composite

Inner ring: stainless steel, hardened and ground

Outer ring: stainless steel body pressed around, outer race lined with bronze-PTFE composite

Lubrication: maintenance free

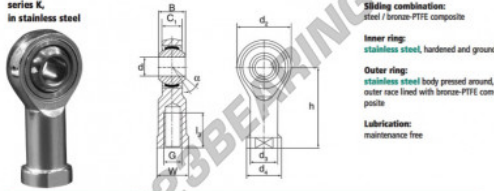

order number	d	G	measurement [mm]					
right hand thread			B	C <sub>1</sub>	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>
SSIL 14 T/K	14	M 14	19	13,50	36	20,0	25	

type	measurement [mm]				load rating C <sub>0</sub> [kN]	weight [kg]
	l <sub>1</sub> min	W	h	α [°]		
SSI / SSIL 14 T/K	25	22	57	16	31,0	0,160

## CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952491332
Diametro interno	14 mm
Diametro esterno	36 mm
Spessore	19 mm
Tipo	SI
Peso	160 g
Il filo	Filetto sinistro
Lubrificazione	senza
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE