

## Teste a snodo SI SSIL20-T-K-DURBAL - SSIL20-T-K-DURBAL

<https://www.123cuscinetti.it/cuscinetti-supporti/teste-snodo/si/ssil20-t-k-durbal>

### SSIL20-T-K



female thread: maintenance free, according to DIN ISO 12240-4, series K, in stainless steel

**Description:** DIN ISO rod end K series. Made of spherical plain bearing DG...PW pressed into rod end body. Sliding combination steel / bronze-PTFE composite.


Red end body: stainless steel

Sliding combination: steel / bronze-PTFE composite

Inner ring: stainless steel, hardened and ground

Outer ring: stainless steel body pressed around, outer race lined with bronze-PTFE composite

Lubrication: maintenance free

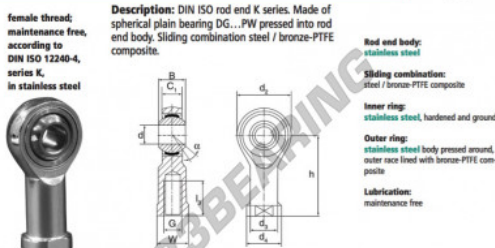

order number	right hand thread	left hand thread	measurement [mm]							
SSIL 20 T/K			d	G	B	C <sub>1</sub>	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>
			20	M 20 x 1,5	25	18,00	50	27,5	34	

type	measurement [mm]				α °FS	load rating C <sub>0</sub> [kN]	weight [kg]
	l <sub>1</sub> min	W	h				
SSI / SSIL 20 T/K	33	30	77		14	57,0	0,420

## CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952491561
Diametro interno	20 mm
Diametro esterno	50 mm
Spessore	25 mm
Tipo	SI
Peso	420 g
Il filo	Filetto sinistro
Lubrificazione	senza
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE