

Teste a snodo SI SSIL25-T-K-DURBAL - SSIL25-T-K-DURBAL

<https://www.123cuscinetti.it/cuscinetti-supporti/teste-snodo/si/ssil25-t-k-durbal>

SSIL25-T-K



female thread: maintenance free, according to DIN ISO 12240-4, series K, in stainless steel

Description: DIN ISO rod end K series. Made of spherical plain bearing DG...PW pressed into rod end body. Sliding combination steel / bronze-PTFE composite.


Red end body: stainless steel

Sliding combination: steel / bronze-PTFE composite

Inner ring: stainless steel, hardened and ground

Outer ring: stainless steel body pressed around, outer race lined with bronze-PTFE composite

Lubrication: maintenance free

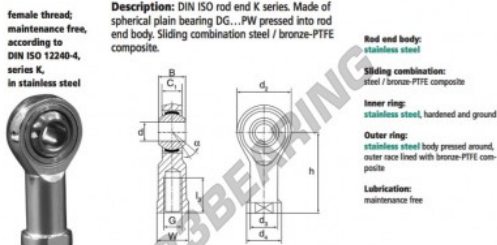

order number	right hand thread	left hand thread	measurement [mm]							
SSIL 25 T/K			d	G	B	C ₁	d ₁	d ₂	d ₃	d ₄
			25	M 24 x 2	31	22,00	60	33,5	42	

type	measurement [mm]				α °	load rating C ₀ [kN]	weight [kg]
	l ₁ min	W	h	α			
SSI / SSIL 25 T/K	42	36	94	15	85,0	0,720	

CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952491646
Diametro interno	25 mm
Diametro esterno	60 mm
Spessore	31 mm
Tipo	SI
Peso	720 g
Il filo	Filetto sinistro
Lubrificazione	senza
Imballaggio	1

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE