

## Teste a snodo SI SIZJL9-DURBAL - DSIZJL9-DURBAL

<https://www.123cuscinetti.it/cuscinetti-supporti/teste-snodo/si/dsizj19-durbal>

### SIZJL9



female thread:  
lubrication  
required,  
similar to  
DIN ISO 12240-4,  
series K,  
measurement in  
inches

**Description:** DIN ISO rod end K series. Dimensions  
in inch. Sliding combination steel / steel.  
Size: 9 with grease nipple can be mounted upon  
request.


Rod end body:  
surface zinc plated

Sliding combination:  
steel / steel

Inner ring:  
bearing steel, hardened, ground and  
spherical surface chromium plated

Outer ring:  
rod end body pressed around inner ring

Lubrication:  
lubrication required

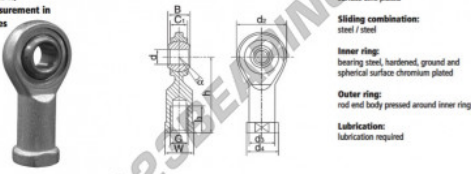

order number	d	B	C <sub>1</sub>	d <sub>2</sub>	G	d <sub>3</sub>	d <sub>4</sub>
SIZJL 9	9,53	12,70	9,12	25,40	3/8 - 24	13,89	17,45

type	inches	l <sub>1</sub> min	W	h	α [°]	load rating C <sub>0</sub> (kN)	weight (kg)
SIZJ / SIZJL 9	3 / 8 "	19,05	14,27	41,28	11,0	16,0	0,059

## CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952496788
Diametro interno	9.53 mm
Diametro esterno	25.4 mm
Spessore	12.7 mm
Tipo	SI
Peso	59 g
Il filo	Filetto sinistro
Lubrificazione	senza
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE