Teste a snodo SA
PM20-02-502-DURBAL - PM20-02-502-DURBAL

https://www.123cuscinetti.it/cuscinetti-supporti/teste-snodo/sa/pm20-02-502-durbal

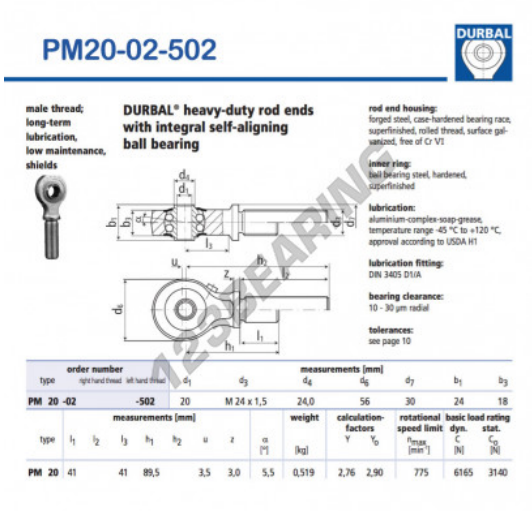

PM20-02-502

DURBAL

male thread; long-term lubrication, low maintenance, shields

DURBAL® heavy-duty rod ends with integral self-aligning ball bearing

rod end housing: forged steel, case-hardened bearing race, superfinished, rolled thread, surface galvanized, free of Cr VI

inner ring: ball bearing steel, hardened, superfinished

lubrication: aluminium-complex-soap-grease, temperature range -45 °C to +120 °C, approval according to USDA H1

lubrication fitting: DIN 3405 D1/A

bearing clearance: 10 - 30 µm radial

tolerances: see page 10

type	order number right hand thread	order number left hand thread	measurements [mm] d_1	d_3	d_4	d_6	d_7	b_1	b_3
PM 20	-02	-502	20	M 24 x 1,5	24,0	56	30	24	18

type	measurements [mm] l_1	l_2	l_3	h_1	h_2	u	z	α [°]	weight [kg]	calculation-factors Y	Y_0	rotational speed limit n_{max} [min⁻¹]	basic load rating dyn. C [N]	stat. C_0 [N]
PM 20	41	41	89,5	3,5	3,0	5,5	0,519	2,76	2,90	775	6165	3140		

123BEARING

CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952507729
Diametro interno	20 mm
Diametro esterno	56 mm
Spessore	24 mm
Tipo	SA
Peso	519 g
Il filo	Filetto sinistro
Lubrificazione	con
Imballaggio	1

contatto@123cuscinetti.it
+33 3 59 36 04 90
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE