

Teste a snodo SI BRTF1-2-00-502-DURBAL - BRTF1-2-00-502-DURBAL

<https://www.123cuscinetti.it/cuscinetti-supporti/teste-snodo/si/brtf1-2-00-502-durbal>

BRTF1/2-00-502



red end housing:
forged steel, case-hardened bearing race, superfinished, surface galvanized, free of Cr VI

inner ring:
ball bearing steel, hardened, superfinished

lubrication:
aluminum-complex soap grease, temperature range -45 °C to +120 °C, approval according to USDA H1


lubrication fitting:
DIN 71 412 H1

bearing clearance:
10 - 30 µm radial

tolerances:
see page 10

DURBAL® heavy-duty rod ends with integral self-aligning roller bearing

female thread:
long-term lubrication, low maintenance, shields, dimensions in inches

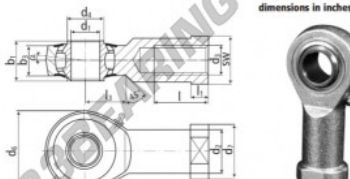

order number		measurements [inches]									
type	right hand thread	left hand thread	d ₁	d ₂	d ₃	d ₄	d ₅	d ₇	b ₁	b ₃	
BRTF 1/2 -00	-502		.500	.748	.5000-20 UNF	.574	1.311	.874	.624	.472	
		measurements [inches]									
type	h	l	l ₁	l ₂	SW	α	weight	rotational speed limit	basic load rating	stat.	
BRTF 1/2	2.145	1.102	.251	.649	.757	7,5	0,127	1125	10250	6600	

CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952510002
Diametro interno	12.7 mm
Diametro esterno	33.3 mm
Spessore	15.85 mm
Tipo	SI
Peso	127 g
Il filo	Filetto sinistro
Lubrificazione	con
Imballaggio	1

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE