


## Teste a snodo SI BRF3-4-00-501-DURBAL - BRF3-4-00-501-DURBAL

<https://www.123cuscinetti.it/cuscinetti-supporti/teste-snodo/si/brf3-4-00-501-durbal>

### BRF3/4-00-501

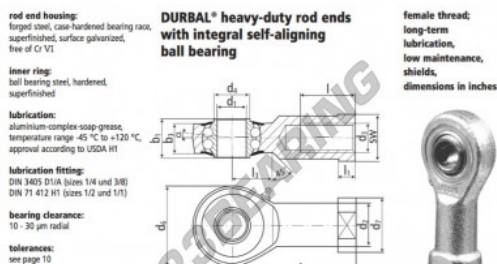

**rod end housing:**  
forged steel, case-hardened bearing race, superfinished, surface galvanized, free of Cr VI

**inner ring:**  
ball bearing steel, hardened, superfinished

**lubrication:**  
aluminum complex soap grease, temperature range -45 °C to +120 °C, approval according to USDA H1

**lubrication fitting:**  
DIN 3405 D1/A (sizes 1/4 and 3/8)  
DIN 71 412 H1 (sizes 1/2 and 1 1/4)

**bearing clearance:**  
10 - 30 µm radial

**tolerances:**  
see page 10

**female thread:**  
long-term lubrication, low maintenance, shields, dimensions in inches



order number		measurements [inches]										
type	right hand thread	left hand thread	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>	d <sub>5</sub>	d <sub>6</sub>	d <sub>7</sub>	b <sub>1</sub>	b <sub>2</sub>	b <sub>3</sub>
BRF 3/4 -00	-501		.750	1.000	.7500-16 UNF	.956	1.750	1.125	.984	.688		
measurements [inches]		weight	calculation factors	rotational speed limit	basic load rating							
type	h	l	l <sub>1</sub>	l <sub>2</sub>	SW	α [°]	weight [kg]	Y	%	rpm	C [N]	C <sub>0</sub> [N]
BRF 3/4	3.051	1.299	.409	.854	1.007	7.0	0,390	2,32	2,43	825	7750	3380

## CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952510187
Diametro interno	19.05 mm
Diametro esterno	44.45 mm
Spessore	24.99 mm
Tipo	SI
Peso	390 g
Il filo	Filetto destro
Lubrificazione	con
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE