Cuscinetti a sfera fila unica
3005-SS-NICE - 3005-SS-NICE

https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-sfera/fila-unica/3005-ss-nice

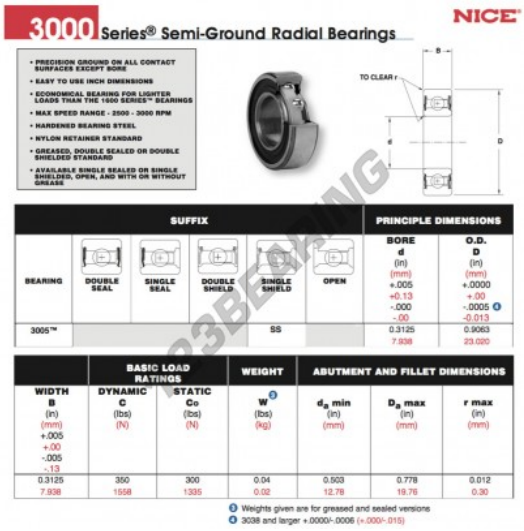

3000 Series® Semi-Ground Radial Bearings — NICE

- PRECISION GROUND ON ALL CONTACT SURFACES EXCEPT BORE
- EASY TO USE INCH DIMENSIONS
- ECONOMICAL BEARING FOR LIGHTER LOADS THAN THE 1500 SERIES™ BEARINGS
- MAX SPEED RANGE - 2500 - 3000 RPM
- HARDENED BEARING STEEL
- NYLON RETAINER STANDARD
- GREASED, DOUBLE SEALED OR DOUBLE SHIELDED STANDARD
- AVAILABLE SINGLE SEALED OR SINGLE SHIELDED, OPEN, AND WITH OR WITHOUT GREASE

TO CLEAR r

SUFFIX						PRINCIPLE DIMENSIONS	
BEARING	DOUBLE SEAL	SINGLE SEAL	DOUBLE SHIELD	SINGLE SHIELD	OPEN	BORE d (in) (mm) +.005 +0.13 -.000 -.00	O.D. D (in) (mm) +.0000 +.00 -.0005 ❹ -0.013
3005™				SS		0.3125 7.938	0.9063 23.020

	BASIC LOAD RATINGS		WEIGHT	ABUTMENT AND FILLET DIMENSIONS		
WIDTH B (in) (mm) +.005 +.00 -.005 -.13	DYNAMIC C (lbs) (N)	STATIC Co (lbs) (N)	W ❸ (lbs) (kg)	d_a min (in) (mm)	D_a max (in) (mm)	r max (in) (mm)
0.3125 7.938	350 1558	300 1335	0.04 0.02	0.503 12.78	0.778 19.76	0.012 0.30

❸ Weights given are for greased and sealed versions
❹ 3038 and larger +.0000/-.0006 (+.000/-.015)

123BEARING

CARATTERISTICHE DEL PRODOTTO

Marchio	NICE
N° Ean13	3663952558189
Diametro interno	7.938 mm
Diametro interno	5/16" inch
Diametro esterno	23.02 mm
Diametro esterno	29/32" inch
Spessore	7.938 mm
Spessore	5/16" inch
Peso	20 g
Imballaggio	1

contatto@123cuscinetti.it
+33 3 59 36 04 90
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE