Cuscinetti a sfera fila unica
3038-DS-NICE - 3038-DS-NICE

https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-sfera/fila-unica/3038-ds-nice

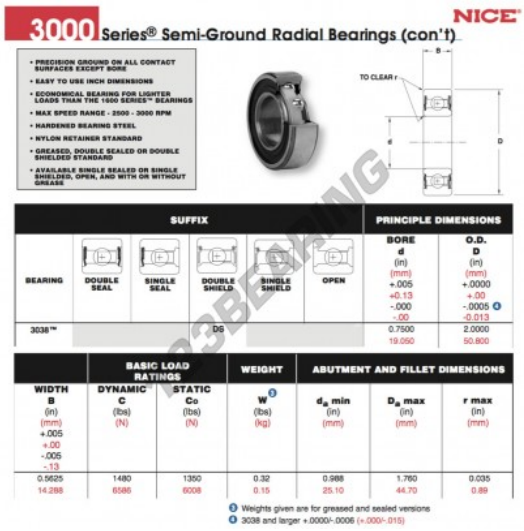

3000 Series® Semi-Ground Radial Bearings (con't)

NICE

- PRECISION GROUND ON ALL CONTACT SURFACES EXCEPT BORE
- EASY TO USE INCH DIMENSIONS
- ECONOMICAL BEARING FOR LIGHTER LOADS THAN THE 1600 SERIES™ BEARINGS
- MAX SPEED RANGE - 2500 - 3000 RPM
- HARDENED BEARING STEEL
- NYLON RETAINER STANDARD
- GREASED, DOUBLE SEALED OR DOUBLE SHIELDED STANDARD
- AVAILABLE SINGLE SEALED OR SINGLE SHIELDED, OPEN, AND WITH OR WITHOUT GREASE

TO CLEAR r

SUFFIX						PRINCIPLE DIMENSIONS	
BEARING	DOUBLE SEAL	SINGLE SEAL	DOUBLE SHIELD	SINGLE SHIELD	OPEN	BORE d (in) (mm) +.005 +0.13 -.000 -.00	O.D. D (in) (mm) +.0000 +.00 -.0005 -0.013
3038™			DS			0.7500 19.050	2.0000 50.800

	BASIC LOAD RATINGS		WEIGHT	ABUTMENT AND FILLET DIMENSIONS		
WIDTH B (in) (mm) +.005 +.00 -.005 -.13	DYNAMIC C (lbs) (N)	STATIC Co (lbs) (N)	W (lbs) (kg)	d_a min (in) (mm)	D_a max (in) (mm)	r max (in) (mm)
0.5625 14.288	1480 6586	1350 6008	0.32 0.15	0.988 25.10	1.760 44.70	0.035 0.89

Weights given are for greased and sealed versions
3038 and larger +.0000/-.0005 (+.000/-.015)

CARATTERISTICHE DEL PRODOTTO

Marchio	NICE
N° Ean13	3663952558820
Diametro interno	19.05 mm
Diametro esterno	50.8 mm
Spessore	14.288 mm
Peso	150 g
Imballaggio	1

contatto@123cuscinetti.it
+33 3 59 36 04 90
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE