


## Gusci a rullini TAM1725-IKO - TAM1725-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/tam1725-iko>

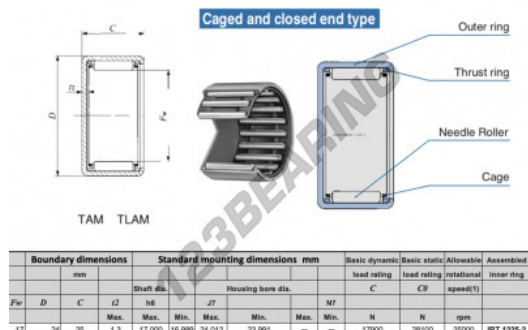

Boundary dimensions		Standard mounting dimensions mm						Basic dynamic		Basic static		Allowable		Assembled
mm		Shaft dia.		Housing bore dia.				load rating		load rating		rotational		inner ring
Fr	D	C	i2	h6	J7	Min.	Max.	Min.	Max.	N	N	rpm		
17	24	25	1.3	17.000	16.989	24.012	23.991	—	—	17900	28100	25000	INT 123B-2	

## CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060598974
Diametro interno	17 mm
Diametro interno	0.669" inch
Diametro esterno	24 mm
Diametro esterno	0.945" inch
Spessore	25 mm
Spessore	0.984" inch
Velocità limite	25000 rpm
Carico dinamico	17.9 kN
Carico statico	28.1 kN
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE