


## Gusci a rullini TLA5026-UU-IKO - TLA5026-UU-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/tla5026-uu-iko>

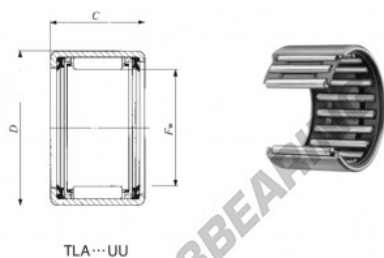

TLA...UU

Shell Type needle roller with seals

| P  | Boundary dimension mm |    |    | Standard mounting dimension mm |        |        |        | Basic dynamic load rating |                | Basic static load rating |                | Allowable rotational speed(1) |
|----|-----------------------|----|----|--------------------------------|--------|--------|--------|---------------------------|----------------|--------------------------|----------------|-------------------------------|
|    | D                     | C  | F  | Min.                           | Max.   | Min.   | Max.   | C                         | C <sub>0</sub> | N                        | N <sub>0</sub> |                               |
| 33 | 58                    | 26 | 20 | 52,000                         | 49,850 | 57,591 | 57,591 | 28000                     | 64100          | 3500                     | 3500           |                               |

### CARATTERISTICHE DEL PRODOTTO

|                  |               |
|------------------|---------------|
| Marchio          | IKO           |
| N° Ean13         | 3616060601117 |
| Diametro interno | 50 mm         |
| Diametro esterno | 58 mm         |
| Spessore         | 26 mm         |
| Velocità limite  | 3500 rpm      |
| Carico dinamico  | 28.8 kN       |
| Carico statico   | 64.1 kN       |
| Imballaggio      | 1             |

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE