


## Gusci a rullini BA168-Z-IKO - BA168-Z-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba168-z-iko>

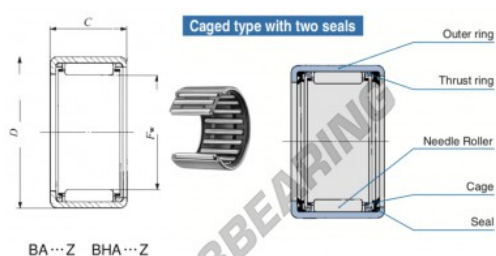

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r/min)	Assembled inner ring	
$P_{10}$	$D$	$C$	$d_2$	$b_6$	$JT$	Housing bore dia.	$C$	$C^*$			
			Max.	Min.		Max.	Min.	N	N		
25.400	(1.01.790)	(11.41)	12.700	.8000	2.8			6240	12000	15000	IRB

## CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060601162
Diametro interno	25.4 mm
Diametro esterno	31.75 mm
Spessore	12.7 mm
Velocità limite	15000 rpm
Carico dinamico	8.24 kN
Carico statico	12000 kN
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE