


Gusci a rullini BA1616-Z-IKO - BA1616-Z-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba1616-z-iko>

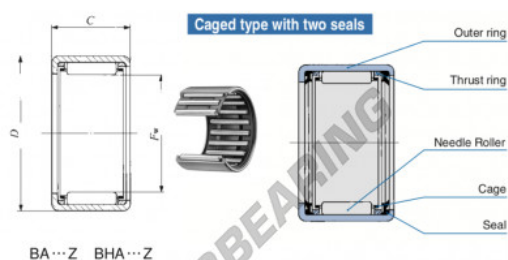

Boundary dimensions		mm(inch)		Standard mounting dimensions				mm		Basic dynamic	Basic static	Allowable	Assembled
For	D	C	d	Shaft dia.	Housing bore dia.	IT	IT	Max.	Min.	load rating	load rating	rotational speed(r)	inner ring
	Max.	Max.	Min.	Max.	Min.			N	N	rpm			
	25.400 (1.0)	31.750 (1.25)	25.400 (1.000)							19400	36300	15000	RB 1218

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060601209
Diametro interno	25.4 mm
Diametro esterno	31.75 mm
Spessore	25.4 mm
Velocità limite	15000 rpm
Carico dinamico	19.4 kN
Carico statico	36.3 kN
Imballaggio	1

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE