


Gusci a rullini BA1620-Z-IKO - BA1620-Z-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba1620-z-iko>

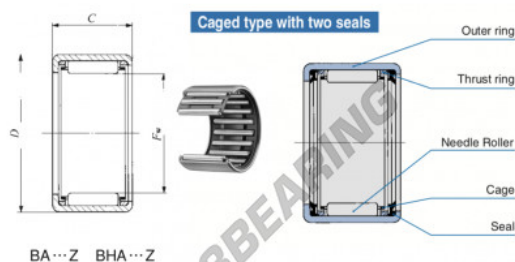

| Boundary dimensions mm(inch) | | | Standard mounting dimensions mm | | | | Basic dynamic | Basic static | Allowable | Assemble |
|------------------------------|----------------|----------------|---------------------------------|------|------|------|---------------|--------------|------------|------------|
| F_w | D | C | d | h | D | d | load rating | load rating | rotational | inner ring |
| | | | Max. | Min. | Max. | Min. | N | N | rpm | |
| 25.400 (1.0) | 31.750 (1.250) | 31.751 (1.250) | 25.4 | | | | 24400 | 48500 | 15000 | IRB 1220 |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | IKO |
| N° Ean13 | 3616060601216 |
| Diametro interno | 25.4 mm |
| Diametro esterno | 31.75 mm |
| Spessore | 31.75 mm |
| Velocità limite | 15000 rpm |
| Carico dinamico | 24.4 kN |
| Carico statico | 48.5 kN |
| Imballaggio | 1 |

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE