


## Gusci a rullini BA2412-Z-IKO - BA2412-Z-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba2412-z-iko>

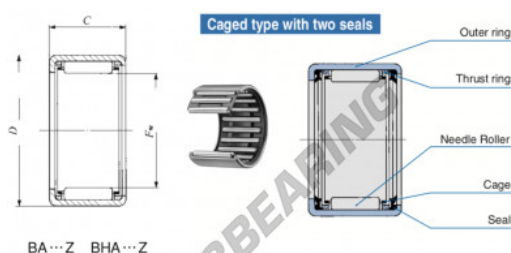

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(l)	Assembled inner ring
$F_w$	D	C	$d$	$H$	Housing bore dia.	C	C <sub>0</sub>	rpm	
	Min.	Max.	Min.	Max.	Min.	Max.	N	N	
38.100 (1.12)	47.625 (1.875)	19.05 (.750)	2.8				22500	36900	9000

## CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060601445
Diametro interno	38.1 mm
Diametro esterno	47.625 mm
Spessore	19.05 mm
Velocità limite	9000 rpm
Carico dinamico	22.5 kN
Carico statico	36.6 kN
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE