


## Gusci a rullini BA2414-Z-IKO - BA2414-Z-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba2414-z-iko>

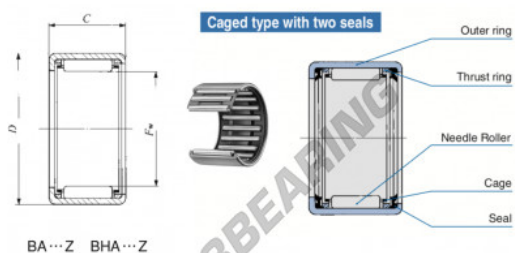

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed <sup>(1)</sup>	Assembled inner ring	
$F_w$	$D$	$C$	$d_1$	$d_2$	$d_3$	$d_4$	$C$	$C_0$	$n$	$n_0$	
38.100 (1.50)	47.625 (1.875)	22.22 (0.875)	Min.	Max.	Min.	Max.	Min.	Max.	26700	45400	9000 (RB 2014)

## CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060601452
Diametro interno	38.1 mm
Diametro esterno	47.625 mm
Spessore	22.22 mm
Velocità limite	9000 rpm
Carico dinamico	26.7 kN
Carico statico	45.6 kN
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE