


Gusci a rullini BA3010-Z-IKO - BA3010-Z-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba3010-z-iko>

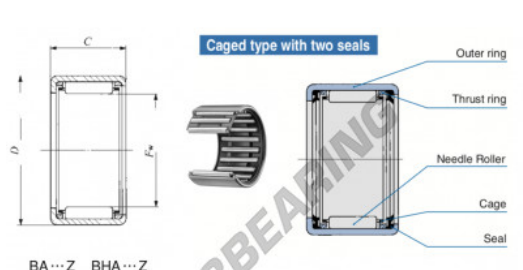

| Boundary dimensions mm[inch] | | Standard mounting dimensions mm | | | | Basic dynamic load rating | Basic static load rating | Allowable rotational speed | Assembled inner ring |
|------------------------------|-----------------|---------------------------------|-----|-------|-------------------|---------------------------|--------------------------|----------------------------|----------------------|
| F_w | D | C | d | d_1 | Housing bore dia. | C | C ₁₀ | rpm | |
| 47.625 (1.8 8/16) | 57.15 (2.2 5/8) | 15.88 (.625) | 46 | 47 | Min. Max. | Min. Max. | 20300 | 34500 | 7000 (RB 2419-1) |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | IKO |
| N° Ean13 | 3616060601551 |
| Diametro interno | 47.625 mm |
| Diametro esterno | 57.15 mm |
| Spessore | 15.88 mm |
| Velocità limite | 7000 rpm |
| Carico dinamico | 20.3 kN |
| Carico statico | 34.5 kN |
| Imballaggio | 1 |

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE