


Gusci a rullini BA3216-Z-IKO - BA3216-Z-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba3216-z-iko>

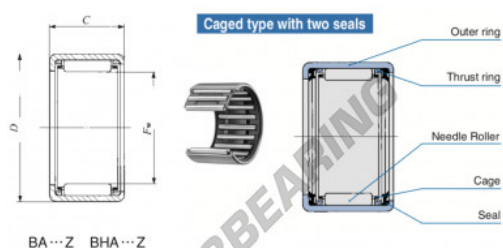

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed		Assembled inner ring
F_w	D	C	d_1	d_2	d_3	C	C_0	n	n_0				
Max.	Max.	Max.	Max.	Min.	Max.	Min.	Min.	rpm	rpm				
50.800 (2)	60.325 (2 3/8)	25.40 (1.000)	2.6					37100	76500			6000(RB 2818)	

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060601582
Diametro interno	50.8 mm
Diametro interno	2" inch
Diametro esterno	60.325 mm
Diametro esterno	2 3/8" inch
Spessore	25.4 mm
Spessore	1" inch
Velocità limite	6000 rpm
Carico dinamico	37.1 kN
Carico statico	76.5 kN
Imballaggio	1

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE