


## Gusci a rullini BA3220-Z-IKO - BA3220-Z-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba3220-z-iko>

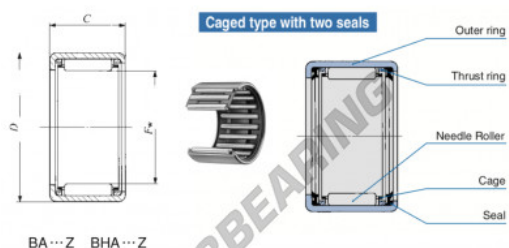

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable	Assembled
$F_w$	$D$	$C$	Shaft dia. $d$	Housing bore dia. $D$	$C'$	$C''$	$H$	$H$	rpm	inner ring		
50.800 (2)	60.325 (2 #8)	31.75 (1.250)	Max.	Max.	Max.	Min.	46600	102000	6000	RB 2720		

### CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060601599
Diametro interno	50.8 mm
Diametro esterno	60.325 mm
Spessore	31.75 mm
Velocità limite	6000 rpm
Peso	128 g
Carico dinamico	46.6 kN
Carico statico	102 kN
Imballaggio	-
Standard	Nessuno standard

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE