


## Gusci a rullini BA108-Z-IKO - BA108-Z-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba108-z-iko>

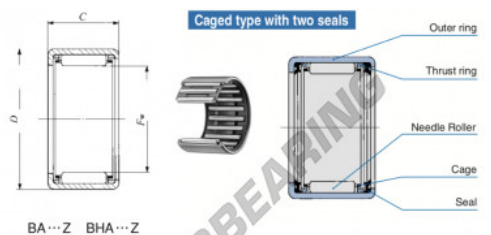

BA...Z BHA...Z

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic	Basic static	Allowable	Assembled
$F_w$	$D$	$C$	$\frac{D}{2}$	$W$	$Z$	load rating	load rating	rotational	inner ring	
			Min.	Min.	Max.	Min.	N	N	rpm	
15.875 (5/8)	20.638 (81/64)	12.7 (1/2)	12.7 (1/2)	5.00 (1/4)	1.3	5420	7310	25000	RB 68-1	

## CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060602954
Diametro interno	15.875 mm
Diametro esterno	20.638 mm
Spessore	12.7 mm
Velocità limite	25000 rpm
Carico dinamico	5.42 kN
Carico statico	7.31 kN
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE