


Gusci a rullini BA88-Z-IKO - BA88-Z-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba88-z-iko>

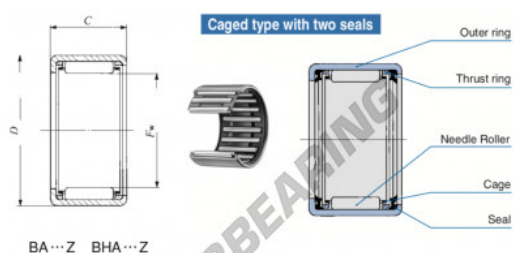

BA...Z BHA...Z

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r)	Assembled inner ring		
P_{in}	D	C	d_2	d_1	Housing bore dia. d_2	C	C_0	rpm			
			Max.	Max.	Min.	Max.	Min.	N	N		
12,700 (1/2)	17,462 (0.686)	12,750 (500)	1	12,700	12,689	17,472	17,454	4710	5700	30000	RB 58

CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060603081
Diametro interno	12.7 mm
Diametro esterno	17.462 mm
Spessore	12.7 mm
Velocità limite	30000 rpm
Carico dinamico	4.71 kN
Carico statico	5.7 kN
Imballaggio	1

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE