


## Gusci a rullini BA1214-Z-IKO - BA1214-Z-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba1214-z-iko>

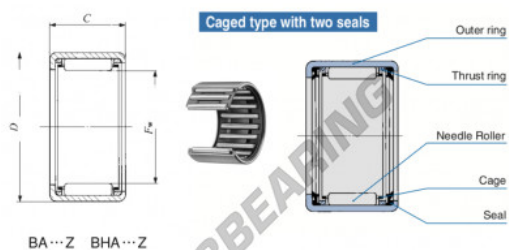

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed(r/min)	Assembled inner ring
$F_w$	$D$	$C$	$d_2$	$H_0$	$J_1$	$C$	$C_0$	$N$	$N_0$	rpm		
19.990 (0.41)	25.400 (1)	22.221 (0.875)	1.3	19.050	19.037	25.412 (1)	25.391	14200	22200	20000	RB #14-1	

## CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060603197
Diametro interno	19.05 mm
Diametro esterno	25.4 mm
Spessore	22 mm
Velocità limite	20000 rpm
Carico dinamico	14 kN
Carico statico	22 kN
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE