


## Gusci a rullini BA1216-Z-IKO - BA1216-Z-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba1216-z-iko>

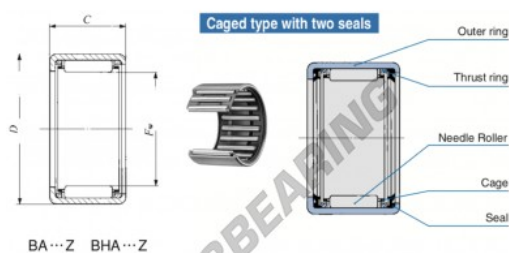

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed <sup>(1)</sup>	Assembled inner ring	
$F_w$	$D$	$C$	$G$	$H$	$J$	$C$	$C_0$	rpm		
		Max.	Max.	Min.	Max.	Min.	N	N		
19,950 (0.7854)	25,400 (1.0)	21,430 (847.6)	19,050	19,037	25,412 (1.0)	25,391	16300	26500	20500	IRB B16-1

## CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060603203
Diametro interno	19.05 mm
Diametro esterno	25.4 mm
Spessore	25 mm
Velocità limite	20000 rpm
Carico dinamico	16 kN
Carico statico	26 kN
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE