


## Gusci a rullini BA1310-Z-IKO - BA1310-Z-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba1310-z-iko>

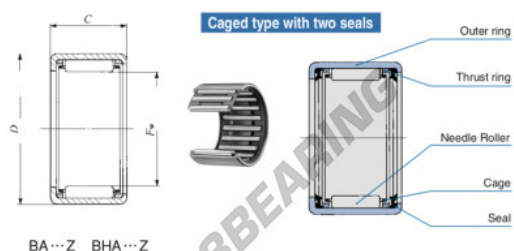

| Boundary dimensions mm(inch) |                | Standard mounting dimensions mm |           |                |                             | Basic dynamic load rating | Basic static load rating | Allowable relative speed <sup>(1)</sup> | Assembled inner ring |
|------------------------------|----------------|---------------------------------|-----------|----------------|-----------------------------|---------------------------|--------------------------|-----------------------------------------|----------------------|
| <i>F<sub>0</sub></i>         | <i>D</i>       | <i>C</i>                        | <i>i2</i> | <i>h6</i>      | Housing bore dia. <i>H7</i> | <i>C</i>                  | <i>C0</i>                | rpm                                     |                      |
|                              | 26.988 (1.062) | 15.881 (0.625)                  | 1.3       | 20.630 (0.812) | 27.010 (1.064)              | 9.87                      | 14.200                   | 19000                                   | 19000                |

## CARATTERISTICHE DEL PRODOTTO

|                  |               |
|------------------|---------------|
| Marchio          | IKO           |
| N° Ean13         | 3616060603234 |
| Diametro interno | 20.638 mm     |
| Diametro esterno | 26.988 mm     |
| Spessore         | 15.88 mm      |
| Velocità limite  | 19000 rpm     |
| Carico dinamico  | 9.87 kN       |
| Carico statico   | 14.2 kN       |
| Imballaggio      | 1             |

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE