


## Gusci a rullini BA1414-Z-IKO - BA1414-Z-IKO

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rullini/gusci-rullini/ba1414-z-iko>

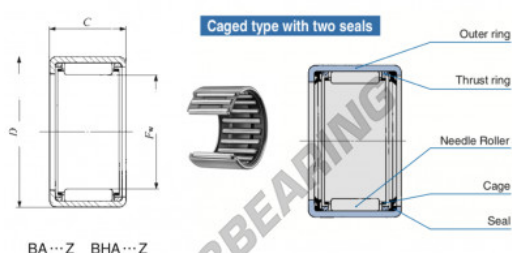

Boundary dimensions mm(inch)		Standard mounting dimensions mm			Basic dynamic load rating		Basic static load rating		Allowable rotational speed <sup>(1)</sup>	Assembled inner ring
$F_w$	$D$	$C$	$r_2$	$r_6$	$r_7$	$C'$	$C''$	rpm	RB 1414	
22.225 (8.8)	28.575 (1.13)	22.22 (875)	2.0	22.225	22.212	Min.	Min.	15300	20500	18000
						28.587	28.586			

## CARATTERISTICHE DEL PRODOTTO

Marchio	IKO
N° Ean13	3616060603319
Diametro interno	22.225 mm
Diametro interno	7/8" inch
Diametro esterno	28.575 mm
Diametro esterno	1 1/8" inch
Spessore	22.22 mm
Spessore	0.875" inch
Velocità limite	18000 rpm
Carico dinamico	15.3 kN
Carico statico	25.5 kN
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE