# Cuscinetti conico
# M238849-M238810-TIMKEN - M238849-10-TIMKEN

https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/m238849-10-timken

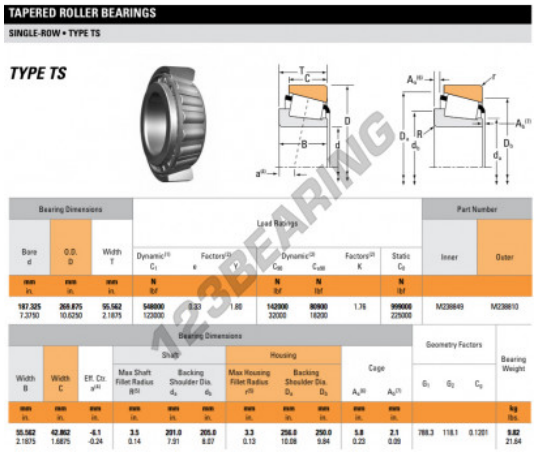

TAPERED ROLLER BEARINGS

SINGLE-ROW • TYPE TS

TYPE TS

| Bearing Dimensions | | | Load Ratings | | | | | | | Part Number | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Bore d | O.D. D | Width T | Dynamic[1] $C_1$ | Factors[2] e | Y | Dynamic[2] $C_{90}$ | $C_{u90}$ | Factors[2] K | Static $C_0$ | Inner | Outer |
| mm / in. | mm / in. | mm / in. | N / lbf | | | N / lbf | N / lbf | | N / lbf | | |
| 187.325 / 7.3750 | 269.875 / 10.6250 | 55.562 / 2.1875 | 548000 / 123000 | 0.33 | 1.86 | 142000 / 32000 | 80000 / 18000 | 1.76 | 999000 / 225000 | M238849 | M238810 |

| Bearing Dimensions | | | Shaft | | | Housing | | | Cage | | Geometry Factors | | | Bearing Weight |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Width B | Width C | Eff. Ctr. a[4] | Max Shaft Fillet Radius $r_{as}$[5] | Backing Shoulder Dia. $d_b$ | $d_a$ | Max Housing Fillet Radius $r_{bs}$[5] | Backing Shoulder Dia. $D_b$ | $D_a$ | $A_w$[6] | $A_b$[7] | $G_1$ | $G_2$ | $C_y$ | |
| mm / in. | mm / in. | mm / in. | mm / in. | mm / in. | mm / in. | mm / in. | mm / in. | mm / in. | mm / in. | mm / in. | | | | kg / lbs. |
| 55.562 / 2.1875 | 42.862 / 1.6875 | -6.1 / -0.24 | 3.5 / 0.14 | 201.0 / 7.91 | 205.0 / 8.07 | 3.3 / 0.13 | 256.0 / 10.08 | 250.0 / 9.84 | 5.8 / 0.23 | 2.1 / 0.09 | 788.3 | 118.1 | 0.1201 | 9.82 / 21.64 |

## CARATTERISTICHE DEL PRODOTTO

| | |
|---|---|
| Marchio | TIMKEN |
| N° Ean13 | 3663952326757 |
| Diametro interno | 187.325 mm |
| Diametro interno | 7 3/8" inch |
| Diametro esterno | 269.875 mm |
| Diametro esterno | 10 5/8" inch |
| Spessore | 55.562 mm |
| Spessore | 2 3/16" inch |
| Peso | 9820 g |
| Imballaggio | 1 |
| Standard | Nessuno standard |

contatto@123cuscinetti.it
+33 3 59 36 04 90
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE