


## Cuscinetti conico 2474-2420-TIMKEN - 2474-2420-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/2474-2420-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

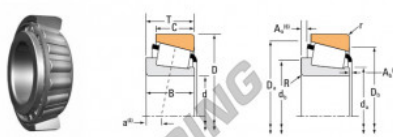

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width B	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Dynamic <sup>(1)</sup> C <sub>2</sub>	Factor <sup>(2)</sup> e <sub>2</sub>	Static C <sub>3</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
28.575	68.262	22.225	6760	1.17	17500	16000	1.72	23200	2474	2420
0.1250	2.6875	0.8750	15500		3940	2200		16500		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Width B		ER. Dr. e <sup>(1)</sup>		Shaft		Housing		Cage		G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>		
mm	mm	mm	mm	Max Shaft Fillet Radius R <sub>1</sub> <sup>(1)</sup>	Backing Shoulder Dia. d <sub>1</sub> <sup>(1)</sup>	Max Housing Fillet Radius r <sub>1</sub> <sup>(1)</sup>	Backing Shoulder Dia. D <sub>1</sub> <sup>(1)</sup>	A <sub>1</sub> <sup>(1)</sup>	A <sub>2</sub> <sup>(1)</sup>				kg	
22.812	17.462	-4.4	0.8	35.0	36.8	1.5	63.0	60.0	0.9	0.3	10.0	10.5	0.9652	0.42
0.9375	0.6875	-0.26	0.03	1.38	1.42	0.06	2.49	2.38	0.03	0.01				0.90

### CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952307015
Diametro interno	28.58 mm
Diametro esterno	68.26 mm
Spessore	22.23 mm
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE