


## Cuscinetti conico

### LM603049AS-LM603011-TIMKEN - LM603049AS-LM603011-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/lm603049as-lm603011-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

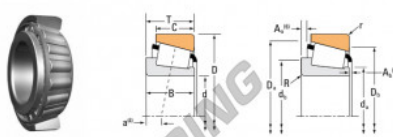

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width B	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Dynamic <sup>(3)</sup> C <sub>2</sub>	Factor <sup>(4)</sup> K	Static C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
45.242	77.788	19.842	76300	1.41	18900	14500	1.37	77900	LM603049AS	LM603011
1.7812	3.0625	0.7812	17200		4850	3250		17500		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Width B	Width C	ER. Dr. a <sup>(1)</sup>	Max Shaft Fillet Radius R <sup>(2)</sup>	Backing Shoulder Dia. d <sub>s</sub>	Max Housing Fillet Radius r <sup>(3)</sup>	Backing Shoulder Dia. D <sub>s</sub>	Cage A <sub>1</sub> <sup>(4)</sup>	A <sub>2</sub> <sup>(5)</sup>	G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>			
mm	mm	mm	mm	mm	mm	mm	mm	mm				kg		
19.842	15.980	-3.3	0.8	52.8	53.8	0.8	24.9	71.8	1.2	1.5	26.4	14.4	0.0785	0.37
0.7812	0.5837	-0.09	0.03	2.05	2.09	0.03	2.91	2.80	0.05	0.06				0.81

## CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952314815
Diametro interno	45.242 mm
Diametro interno	1 25/32" inch
Diametro esterno	77.788 mm
Diametro esterno	3 1/16" inch
Spessore	19.842 mm
Spessore	25/32" inch
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE