Cuscinetti conico
644-632-TIMKEN - 644-632-TIMKEN

https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/644-632-timken

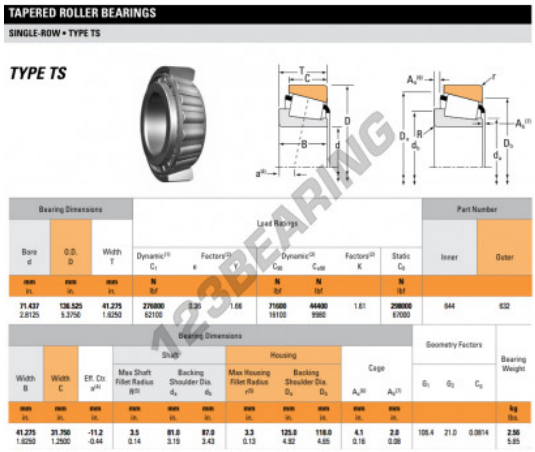

TAPERED ROLLER BEARINGS

SINGLE-ROW • TYPE TS

TYPE TS

Bearing Dimensions			Load Ratings							Part Number	
Bore d	O.D. D	Width T	Dynamic[1] C_1	Factors[1] e	Y	Dynamic[2] C_{90}	C_{u90}	Factors[2] K	Static C_0	Inner	Outer
mm / in.	mm / in.	mm / in.	N / lbf			N / lbf	N / lbf		N / lbf		
71.437 / 2.8125	136.525 / 5.3750	41.275 / 1.6250	276000 / 62100	0.35	1.66	71600 / 16100	44400 / 9980	1.81	298000 / 67000	644	632

Bearing Dimensions			Shaft			Housing			Cage		Geometry Factors			Bearing Weight
Width B	Width C	Eff. Ctr. a[4]	Max Shaft Fillet Radius r_{as}[5]	Backing Shoulder Dia. d_b	d_a	Max Housing Fillet Radius r_{hs}[5]	Backing Shoulder Dia. D_b	D_a	A_w[6]	A_b[7]	G_1	G_2	C_y	
mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.				kg / lbs.
41.275 / 1.6250	31.750 / 1.2500	-11.2 / -0.44	3.5 / 0.14	81.0 / 3.19	87.0 / 3.43	3.3 / 0.13	125.0 / 4.92	118.0 / 4.65	4.1 / 0.16	2.0 / 0.08	106.4	21.0	0.0814	2.56 / 5.65

123BEARING

CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952321066
Diametro interno	71.437 mm
Diametro esterno	136.525 mm
Spessore	41.275 mm
Imballaggio	1

contatto@123cuscinetti.it
+33 3 59 36 04 90
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE