


## Cuscinetti conico

### HH224346-HH224310-TIMKEN - HH224346-HH224310-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/hh224346-hh224310-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE ROW • TYPE TS

**TYPE TS**

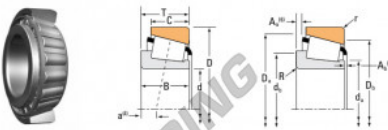

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width B	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Dynamic <sup>(1)</sup> C <sub>2</sub>	Factor <sup>(2)</sup> e <sub>2</sub>	Static C <sub>3</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
114.300	212.725	66.675	68000	1.04	17600	9630	1.78	99000	HH224346	
4.500	8.375	2.625	10000		3800	2270		20400	HH224310	

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft		Bearing		Housing		Cage								
Width B	Width C	ER. Dr. α <sup>(1)</sup>	Max Shaft Fillet Radius R <sub>f1</sub>	Backling Shoulder Dia. d <sub>s</sub>	Max Housing Fillet Radius r <sub>1</sub> <sup>(2)</sup>	Backling Shoulder Dia. D <sub>s</sub>	A <sub>1</sub> <sup>(3)</sup>	A <sub>2</sub> <sup>(3)</sup>	G <sub>1</sub>	G <sub>2</sub>	C <sub>1</sub>			
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg		
66.675	93.875	-18.8	7.8	121.0	143.0	3.3	201.7	192.0	4.8	3.8	366.6	47.0	0.1182	8.92
2.6250	2.1250	-0.14	0.28	5.16	5.83	0.13	7.94	7.58	0.19	0.12				21.85

## CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952324654
Diametro interno	114.3 mm
Diametro esterno	212.725 mm
Spessore	66.675 mm
secondo spessore	53.975 mm
Peso	21850 g
Carico dinamico	1760 kN
Carico statico	906 kN
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE