


## Cuscinetti conico 32940-TIMKEN - 32940-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/32940-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • IsoClass

**IsoClass**

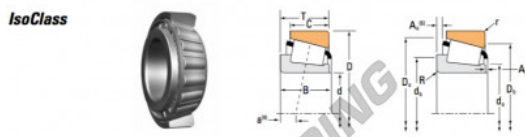

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Dynamic <sup>(3)</sup> C <sub>2</sub>	Factor <sup>(3)</sup> K	Static C <sub>0</sub>	Assembly Inner/Outer	Part Number	
mm	mm	mm	N		N	N	N			
200.000	280.000	51.000	301000	4.25	145000	18300	1.48	1050000	32940	
7.8740	11.0236	2.0079	126000		32700	22100		250000		

Mounting Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					Cage	G <sub>1</sub>	G <sub>2</sub>		C <sub>3</sub>
Width B	Width C	ER Co. a <sup>(4)</sup>	Max Shaft Fillet Radius R <sup>(5)</sup>	Backing Shoulder Dia. d <sub>s</sub>	Max Housing Fillet Radius r <sup>(6)</sup>	Backing Shoulder Dia. D <sub>s</sub>	Backing Shoulder Dia. D <sub>2</sub>	A <sub>11</sub> <sup>(7)</sup>	A <sub>12</sub> <sup>(8)</sup>				G <sub>1</sub>	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
20.000	26.000	3.0	0.12	215.0	217.0	2.5	272.0	282.0	4.6	1.6	103.3	226.2	0.129	0.45
2.0079	1.5204	0.12	0.20	8.54	8.52	0.10	10.71	11.25	0.18	0.06				0.45

### CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952354125
Diametro interno	200 mm
Diametro interno	7.874" inch
Diametro esterno	280 mm
Diametro esterno	11.024" inch
Spessore	51 mm
Spessore	2.008" inch
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE