


Cuscinetti conico

36690-36620D-TIMKEN - 36690-36620D-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/36690-36620d-timken>

TAPERED ROLLER BEARINGS
DOUBLE-ROW • TYPE TDD

TYPE TDD

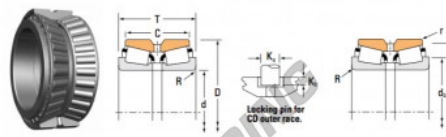

| Bearing Dimensions | | | | Load Ratings | | | | | | | |
|--------------------|---------|---------|---------------------------|------------------------|------|-----------------------|------|------------------------|-----------------|-----------------------|------|
| Bore d | O.D. D | Width T | Double Outer Ring Width C | Dynamic ⁽¹⁾ | | Static ⁽²⁾ | | Dynamic ⁽³⁾ | | Factor ⁽⁴⁾ | |
| mm | mm | mm | mm | C ₁₀ | C | N ₁₀ | N | C ₁₀ | C ₅₀ | C ₁₀₀ | K |
| 146.050 | 193.675 | 65.085 | 53.875 | 342000 | 0.37 | 1.83 | 2.73 | 50900 | 32100 | 88000 | 1.58 |
| 5.790 | 7.6250 | 2.5624 | 2.1250 | 19300 | | | | 11400 | 7220 | 19900 | |

| Part Number | | Dimensions | | | | | | Pin | | Geometry Factors | | | Bearing Weight |
|-------------|--------|---|--------------------------------------|---|--------------------------------------|----------------|----------------|----------------|----------------|------------------|----------------|-------|----------------|
| Inner | Outer | Max. Shaft Fillet Radius R ₁ | Backing Shoulder Dia. d ₂ | Max. Housing Fillet Radius r ₁ | Backing Shoulder Dia. D ₂ | K ₁ | K ₂ | G ₁ | G ₂ | C ₁ | C ₂ | | |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | kg | |
| 36690 | 36620D | 1.5 | 155.8 | 0.8 | 198.8 | - | - | 385.1 | 152.5 | 0.1788 | 0.1788 | 4.89 | |
| | | 0.06 | 8.10 | 0.05 | 7.42 | | | | | | | 10.80 | |

CARATTERISTICHE DEL PRODOTTO

| | |
|------------------|---------------|
| Marchio | TIMKEN |
| N° Ean13 | 3663952359991 |
| Diametro interno | 146.05 mm |
| Diametro esterno | 193.675 mm |
| Spessore | 65.085 mm |
| Imballaggio | 1 |

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE