


Teste a snodo TAPR GIHL-K50-DO-DURBAL - GIHL-K50-DO-DURBAL

<https://www.123cuscinetti.it/cuscinetti-supporti/teste-snodo/tapr/gihl-k50-do-durbal>

GIHL-K50-DO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE...ES pressed into rod end housing. Sliding combination steel / steel, with grease nipple.

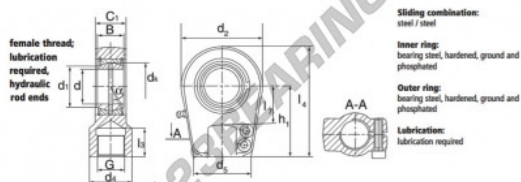

Sliding combination:
steel / steel
Inner ring:
bearing steel, hardened, ground and phosphated
Outer ring:
bearing steel, hardened, ground and phosphated
Lubrication:
lubrication required

order number	d	d ₁	G	d ₂	B	C ₁	d ₂
GIHL-K 50 DO	50	55,9	M 45 x 1,5	61	90	35	40

type	l ₁ min	l ₂ min	h ₁	l ₂	d ₁	α [°]	load rating C ₀ [N]	weight [kg]
GIHL-K / GIHL-K 50 DO	46	55	105	168,0	60,0	6	385	3,80

CARATTERISTICHE DEL PRODOTTO

Marchio	DURBAL
N° Ean13	3663952499185
Diametro interno	50 mm
Diametro interno	1.969" inch
Diametro esterno	116 mm
Diametro esterno	4.567" inch
Spessore	40 mm
Spessore	1.575" inch
Tipo	TAPR
Peso	3800 g
Il filo	Filetto sinistro
Lubrificazione	con
Imballaggio	1

contatto@123cuscinetti.it

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE