


## Cuscinetti conico 26880-26821-TIMKEN - 26880-26821-TIMKEN

<https://www.123cuscinetti.it/cuscinetti-supporti/cuscinetti-rulli/conico/26880-26821-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE ROW • TYPE TS

**TYPE TS**

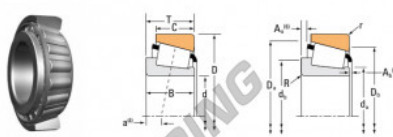

Bearing Dimensions			Load Ratings							Part Number	
Bore d	O.D. D	Width B	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Dynamic <sup>(1)</sup> C <sub>0e</sub>	Factor <sup>(2)</sup> K	Static C <sub>0</sub>	Inner	Outer		
mm	mm	mm	N		N		N				
29.687	80.167	29.370	91500	0.32	1.08	23000	12900	1.02	119000	26880	26821
1.5625	3.1562	1.1563	28500			5310	2900		38000		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Width B	Width C	ER. Dr. α <sup>(1)</sup>	Max Shaft Fillet Radius R <sup>(1)</sup>	Backing Shoulder Dia. d <sub>1</sub>	Backing Shoulder Dia. d <sub>2</sub>	Max Housing Fillet Radius r <sup>(1)</sup>	Backing Shoulder Dia. D <sub>1</sub>	Backing Shoulder Dia. D <sub>2</sub>	Cage A <sub>1</sub> <sup>(1)</sup>	Cage A <sub>2</sub> <sup>(1)</sup>	G <sub>1</sub>	G <sub>2</sub>		C <sub>1</sub>
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm				kg
25.400	24.800	-3.4	1.5	45.5	48.8	3.3	34.0	68.0	1.4	1.3	32.0	13.3	0.0700	8.83
1.0000	0.9800	-0.29	0.06	1.79	1.89	0.13	2.91	2.68	0.05	0.05				1.40

### CARATTERISTICHE DEL PRODOTTO

Marchio	TIMKEN
N° Ean13	3663952312514
Diametro interno	39.687 mm
Diametro interno	1 9/16" inch
Diametro esterno	80.167 mm
Diametro esterno	3 5/32" inch
Spessore	29.37 mm
Spessore	1 5/32" inch
Imballaggio	1

[contatto@123cuscinetti.it](mailto:contatto@123cuscinetti.it)

+33 3 59 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE